

# VEI Systems Installation Instructions

## V1-DCC-D-Mx – Digital Clock


Please read these instructions completely before beginning installation to ensure that you have the tools and skills necessary for installation and operation of this instrument. If you are not sure that you can perform the installation safely, then consult a qualified installer. Further instructions available at [www.VEISystems.com/technical.html](http://www.VEISystems.com/technical.html).

### MOUNTING

Attach the legs under the body with the double-sided adhesive tape provided. The small switch protruding from the front of the clock is centered at the bottom of the display, so you can align the legs using this. Alternatively, you could skip this step until the clock is powered up.

### WIRING

Simply plug the plug from the power transformer into the back of the clock and then plug the power plug into a suitable 120VAC wall outlet.

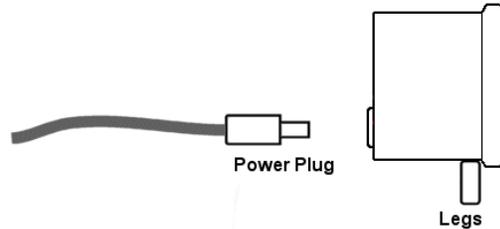

### OPERATION

Press and hold the button for a few seconds to change the mode. Press and release quickly (tap the button) to change the setting in any mode. Modes are as follows:

MODE	DISPLAY	SETTINGS
Normal	(Time)	Tap button to stop alarm
Set time hours	12 . AT	First 2 digits shows hours, third shows AM or PM. "T" at right end indicates "time" being set.
Set time minutes	T . 00	Last 2 digits shows minutes. "T" at left end indicates "time" being set.
Clock mode	12 hr	12-hour or 24-hour format
Alarm mode	AL . On	Last 2 characters shows alarm on or off. "A" at right end indicates "alarm" being set.
Set alarm hours	12 . AA	First 2 digits shows hours, third shows AM or PM. "A" at right end indicates "alarm" being set.
Set alarm minutes	A . 00	Last 2 digits shows minutes. "A" at left end indicates "alarm" being set.
Brightness	Br . 9	Last digit shows brightness level from 1 to 9.

### WARRANTY & LIABILITY

Neither VEI Systems, nor its dealers or agents shall be liable in any way, for any damage, loss, injury or other claims, resulting from the installation or use of this product. By purchasing or installing this product, you assume all liability of any kind connected with the use and/or application of this product. If you are unsure that you can safely install and use this product, consult a qualified installer or mechanic. The warranty on this product covers only the product itself for a period of 1 year from the date of purchase, and it will be at our discretion to repair or replace the affected parts. No user serviceable parts inside. Warranty void if product enclosure opened.